


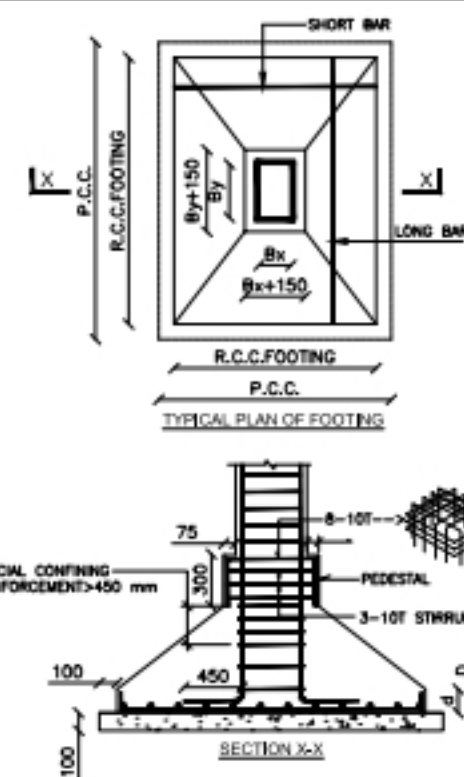

FOOTING NO:	F.C.C. SIZE l x b	FOOTING GRADE	FOOTING SIZE R.C.C		FOOTING DEPTH		BOTTOM REINFORCEMENT		PEDESTAL SIZE	COLUMN SIZE	REMARKS
			B	L	D	d	ALONG SHORT SPAN	ALONG LONG SPAN			
F-1	2000 x 2000	M25	2000	2000	550	200	10T @150 C/C	10T @150 C/C	750 X 750	-	C1,C4,C5,C8,C9
F-2	2500 x 3000	M25	2500	3000	750	200	10T @120 C/C	10T @120 C/C	450 X 750	-	C2,C3,C6,C7,C10,C11,C13
F-3	3000 x 2400	M25	3000	2200	800	300	10T @90 C/C	10T @90 C/C	450 X 750	-	C14,C15,C16,C17,C18,C19
F-4	2400 x 4400	M25	2500	4200	900	400	12T @110 C/C	12T @110 C/C	450 X 750	-	C20,C23,C24,C25
F-5	4000 x 4000	M25	3800	3800	950	200	12T @140 C/C	12T @140 C/C	750 X 750	-	C45
F-7	1900 x 1900	M25	1700	1700	500	200	10T @160 C/C	10T @160 C/C	500 X 500	-	C46,C53
F-8	2500 x 2000	M25	2300	2600	600	200	10T @140 C/C	10T @140 C/C	300 X 750	-	C47,C52
F-9	2000 x 3000	M25	2400	2400	800	200	10T @110 C/C	10T @110 C/C	300 X 750	-	C48,C49,C50,C51
F-10	3500 x 3500	M25	3300	3300	800	200	10T @110 C/C	10T @110 C/C	750 X 750	-	C27
F-11	3400 x 2300	M25	3000	2100	800	300	12T @150 C/C	12T @125 C/C	300 X 750	-	C28
F-12	2300 x 3000	M25	2100	2800	900	300	12T @150 C/C	12T @125 C/C	300 X 750	-	C29
F-13	2400 x 3400	M25	2200	3200	750	300	10T @110 C/C	10T @110 C/C	300 X 750	-	C31
F-14	2600 x 3800	M25	2400	3600	800	300	10T @90 C/C	10T @90 C/C	300 X 750	-	C46
Q1	2000 x 4142	M25	2700	3942			REFER SECTION K-K				C1,C29
Q2	3500 x 4700	M25	3300	4500	800	300	12T @125 C/C	12T @125 C/C	945 X 2190	-	C33 & COLUMN & CLUSTERS & C34 C35 & C36,C37 & C41

Figure 10: Plan view of a column and footing. The diagram shows a square footing with a central column. Key dimensions include: footing width 1154, column width 2191, footing depth 1177, and column depth 473. Reinforcement details include C32, C33, and C34 bars. A 'C.O. POINT' is marked at the center. A 'Y' axis is indicated. A table on the right lists dimensions: 1177, 945, 1177, 1650, 3300, 100.

SECTION Y-Y
(SCALE = 1:50)

100